


SDR6 ELECTROFUSION COUPLER, IPS

Water - 460 PSI at 73 Deg F Sustainable
Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN 16963, EN 1555, EN 12201 ISO-9001 Certified

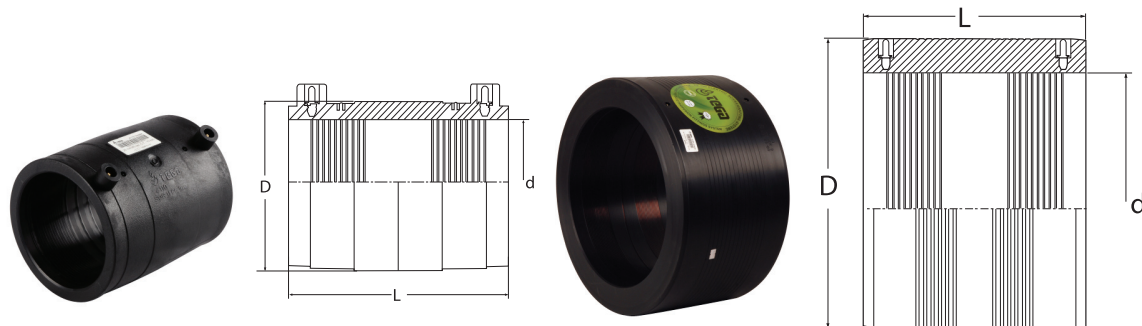

Nominal IPS Pipe Size	ID (Nominal) d	D	L	Unit Weight in lbs.	TYPE	Item Code
2"	2,375	3,80	6,65	0,45	A	30.MA1.11.06.0060
3"	3,500	5,60	6,57	1,00	A	30.MA1.11.06.0088
4"	4,500	7,87	7,28	3,00	A	30.MA1.11.06.0114
6"	6,625	10,23	7,56	5,70	B	30.MA1.11.06.0169
8"	8,625	13,38	7,87	10,20	B	30.MA1.11.06.0219
10"	10,750	16,50	8,66	16,90	B	30.MA1.11.06.0273
12"	12,750	19,29	9,06	23,40	B	30.MA1.11.06.0323
14"	14,000	21,65	10,00	33,60	B	30.MA1.11.06.0355
16" (1)	16,000	24,40	11,81	49,60	B	30.MA1.11.06.0406
18" (1)	18,000	27,55	12,60	67,60	B	30.MA1.11.06.0457

(1) Separate fusion zones