


SDR9 ELECTROFUSION COUPLER IPS

Water 300 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

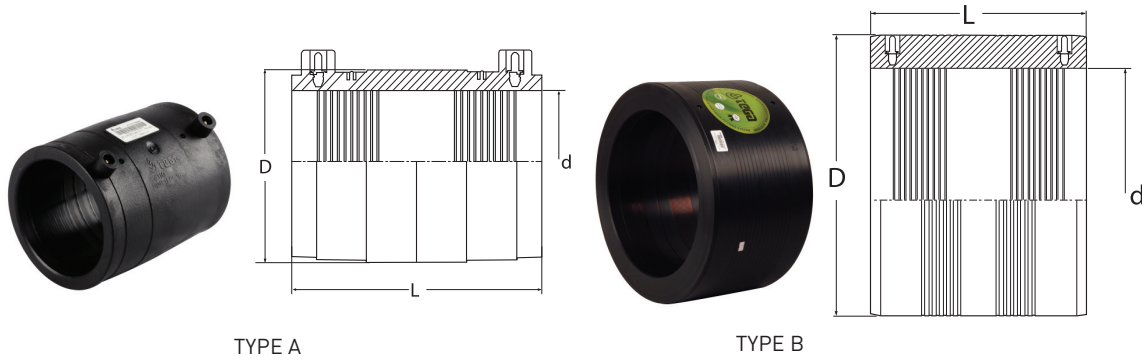

Nominal IPS Pipe Size	ID (Nominal) d	D	L	Unit Weight in lbs.	TYPE	Item Code
2"	2,375	3,82	4,65	1,13	A	30.MA1.11.09.0060
3"	3,500	5,59	6,57	3,40	A	30.MA1.11.09.0088
4"	4,500	6,26	6,69	3,45	A	30.MA1.11.09.0114
5"	5,563	7,87	7,28	6,16	A	30.MA1.11.09.0141
6"	6,625	9,06	7,48	7,76	B	30.MA1.11.09.0169
7"	7,125	9,65	8,66	9,97	B	30.MA1.11.09.0180
8"	8,625	12,01	7,87	14,96	B	30.MA1.11.09.0219
10"	10,750	14,57	8,66	22,79	B	30.MA1.11.09.0273
12"	12,750	16,73	9,06	28,94	B	30.MA1.11.09.0323
14"	14,000	18,31	10,04	38,03	B	30.MA1.11.09.0355
16" (1)	16,000	20,87	11,81	57,69	B	30.MA1.11.09.0406
18" (1)	18,000	23,62	12,60	80,26	B	30.MA1.11.09.0457
20" (1)	20,000	25,98	14,37	107,66	B	30.MA1.11.09.0508
22" (1)	22,000	29,13	15,75	156,40	B	30.MA1.11.09.0558
24" (1)	24,000	32,68	16,54	221,40	B	30.MA1.11.09.0609

(1) Separate fusion zones