


SDR11 ELECTROFUSION TAPPING TEES DUAL RATED WATER/NATURAL GAS

Water - 240 PSI at 73 Deg F Sustainable Maximum
Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum
Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

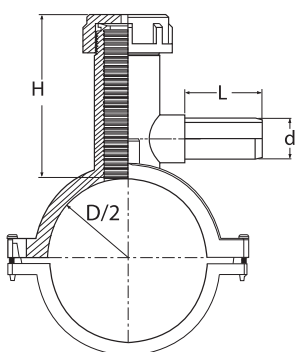

TYPE A



TYPE B



TYPE C



TYPE D

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	H	L	Unit Weight in lbs	TYPE	Item Code
1 1/4"	IPS	1/2"	CTS	4,13	1,73	0,64	A	30.SE1.13.11.4215
1 1/4"	IPS	1/2"	IPS	4,13	1,73	0,66	A	30.SE1.11.11.4221
1 1/4"	IPS	3/4"	CTS	4,13	1,73	0,66	A	30.SE1.13.11.4222
1 1/4"	IPS	3/4"	IPS	4,13	1,73	0,66	A	30.SE1.11.11.4226
1 1/4"	IPS	1"	CTS	4,13	1,73	0,68	A	30.SE1.13.11.4228
1 1/4"	IPS	1"	IPS	4,13	1,85	0,68	A	30.SE1.11.11.4233
1 1/2"	IPS	1/2"	CTS	4,13	2,05	1,06	A	30.SE1.13.11.4815
1 1/2"	IPS	1/2"	IPS	4,13	2,05	1,12	A	30.SE1.11.11.4821
1 1/2"	IPS	3/4"	CTS	4,13	2,05	1,15	A	30.SE1.13.11.4822
1 1/2"	IPS	3/4"	IPS	4,13	2,13	1,26	A	30.SE1.11.11.4826
1 1/2"	IPS	1"	CTS	4,13	2,13	1,28	A	30.SE1.13.11.4828
1 1/2"	IPS	1"	IPS	4,13	3,35	1,30	A	30.SE1.11.11.4833
1 1/2"	IPS	1 1/4"	CTS	4,13	3,35	1,30	A	30.SE1.13.11.4834
2"	IPS	1/2"	CTS	4,13	2,05	1,19	A	30.SE1.13.11.6015
2"	IPS	1/2"	IPS	4,13	2,05	1,23	A	30.SE1.11.11.6021
2"	IPS	3/4"	CTS	4,13	2,05	1,23	A	30.SE1.13.11.6022
2"	IPS	3/4"	IPS	4,13	2,13	1,28	A	30.SE1.11.11.6026
2"	IPS	1"	CTS	4,13	2,13	1,28	A	30.SE1.13.11.6028
2"	IPS	1"	IPS	4,13	3,35	1,30	A	30.SE1.11.11.6033
2"	IPS	1 1/4"	IPS	4,13	3,54	1,30	B	30.SE1.11.11.6042



SDR11 ELECTROFUSION TAPPING TEES DUAL RATED WATER/ NATURAL GAS

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	H	L	Unit Weight in lbs	TYPE	Item Code
2"	IPS	1 1/4"	CTS	4,13	3,35	1,30	A	30.SE1.13.11.6034
2"	IPS	1 1/2"	IPS	7,87	4,53	2,43	B	30.SE1.11.11.6048
2"	IPS	2"	IPS	7,87	4,53	2,65	B	30.SE1.11.11.6060
3"	IPS	1/2"	CTS	5,31	1,85	2,14	A	30.SE1.13.11.8815
3"	IPS	1/2"	IPS	5,31	1,85	2,16	A	30.SE1.11.11.8821
3"	IPS	3/4"	CTS	5,31	1,85	2,16	A	30.SE1.13.11.8822
3"	IPS	3/4"	IPS	5,31	2,05	2,18	A	30.SE1.11.11.8826
3"	IPS	1"	CTS	5,31	2,05	2,18	A	30.SE1.13.11.8828
3"	IPS	1"	IPS	5,31	2,52	2,21	A	30.SE1.11.11.8833
3"	IPS	1 1/4"	IPS	5,31	3,50	2,23	A	30.SE1.11.11.8842
3"	IPS	1 1/4"	CTS	5,31	2,52	2,21	A	30.SE1.13.11.8834
3"	IPS	1 1/2"	IPS	7,09	3,94	3,20	C	30.SE1.11.11.8848
3"	IPS	2"	IPS	7,09	4,33	3,29	C	30.SE1.11.11.8860
4"	IPS	1/2"	CTS	5,31	1,89	2,25	A	30.SE1.13.11.1115
4"	IPS	1/2"	IPS	5,31	1,89	2,27	A	30.SE1.11.11.11121
4"	IPS	3/4"	CTS	5,31	1,89	2,27	A	30.SE1.13.11.11122
4"	IPS	3/4"	IPS	5,31	2,17	2,29	A	30.SE1.11.11.11126
4"	IPS	1"	CTS	5,31	2,17	2,34	A	30.SE1.13.11.11128
4"	IPS	1"	IPS	5,31	2,68	2,36	A	30.SE1.11.11.11133
4"	IPS	1 1/4"	IPS	5,31	2,76	2,38	A	30.SE1.11.11.11142
4"	IPS	1 1/4"	CTS	5,31	2,68	2,36	A	30.SE1.13.11.11134
4"	IPS	1 1/2"	IPS	7,09	2,95	2,38	C	30.SE1.11.11.11148
4"	IPS	2"	IPS	7,09	2,95	3,31	C	30.SE1.11.11.11160
5"	IPS	1/2"	CTS	5,31	2,01	2,91	C	30.SE1.13.11.1315
5"	IPS	1/2"	IPS	5,31	2,01	2,91	C	30.SE1.11.11.1321
5"	IPS	3/4"	CTS	5,31	2,01	2,93	C	30.SE1.13.11.1322
5"	IPS	3/4"	IPS	5,31	1,89	2,93	C	30.SE1.11.11.1326
5"	IPS	1"	CTS	5,31	1,89	2,93	C	30.SE1.13.11.1328
5"	IPS	1"	IPS	5,31	3,27	2,95	C	30.SE1.11.11.1333
5"	IPS	1 1/4"	IPS	5,31	3,50	2,98	C	30.SE1.11.11.1342
5"	IPS	1 1/4"	CTS	5,31	3,27	2,95	C	30.SE1.13.11.1334
5"	IPS	1 1/2"	IPS	7,09	4,06	3,84	C	30.SE1.11.11.1348
5"	IPS	2"	IPS	7,09	4,33	4,01	C	30.SE1.11.11.1360
6"	IPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.1615
6"	IPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.11.11.1621
6"	IPS	3/4"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.1622
6"	IPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.11.11.1626
6"	IPS	1"	CTS	5,31	1,89	1,74	D	30.SE1.13.11.1628
6"	IPS	1"	IPS	5,31	3,27	1,76	D	30.SE1.11.11.1633
6"	IPS	1 1/4"	IPS	5,31	3,50	1,79	D	30.SE1.11.11.1642
6"	IPS	1 1/4"	CTS	5,31	3,27	1,76	D	30.SE1.13.11.1634
6"	IPS	1 1/2"	IPS	7,09	4,06	2,87	D	30.SE1.11.11.1648
6"	IPS	2"	IPS	7,09	4,33	2,87	D	30.SE1.11.11.1660
7"	IPS	1/2"	CTS	5,31	2,01	1,70	D	30.SE1.13.11.1815
7"	IPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.11.11.1821
7"	IPS	3/4"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.1822
7"	IPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.11.11.1826
7"	IPS	1"	CTS	5,31	1,89	1,74	D	30.SE1.13.11.1828
7"	IPS	1"	IPS	5,31	3,27	1,76	D	30.SE1.11.11.1833
7"	IPS	1 1/4"	IPS	5,31	3,50	1,79	D	30.SE1.11.11.1842

SDR11 ELECTROFUSION TAPPING TEES DUAL RATED WATER/NATURAL GAS

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	H	L	Unit Weight in lbs	TYPE	Item Code
7"	IPS	1 1/4"	CTS	5,31	3,27	1,76	D	30.SE1.13.11.1834
7"	IPS	1 1/2"	IPS	7,09	3,39	2,87	D	30.SE1.11.11.1848
7"	IPS	2"	IPS	7,09	3,39	2,87	D	30.SE1.11.11.1860
8"	IPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.2115
8"	IPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.11.11.2121
8"	IPS	3/4"	CTS	5,31	2,01	1,74	D	30.SE1.13.11.2122
8"	IPS	3/4"	IPS	5,31	1,89	1,76	D	30.SE1.11.11.2126
8"	IPS	1"	CTS	5,31	1,89	1,76	D	30.SE1.13.11.2128
8"	IPS	1"	IPS	5,31	3,27	1,79	D	30.SE1.11.11.2133
8"	IPS	1 1/4"	IPS	5,31	3,50	1,81	D	30.SE1.11.11.2142
8"	IPS	1 1/4"	CTS	5,31	3,27	1,79	D	30.SE1.13.11.2134
8"	IPS	1 1/2"	IPS	7,09	3,39	2,76	D	30.SE1.11.11.2148
8"	IPS	2"	IPS	7,09	4,45	2,76	D	30.SE1.11.11.2160
10"	IPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.2715
10"	IPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.11.11.2721
10"	IPS	3/4"	CTS	5,31	2,01	1,72	D	30.SE1.13.11.2722
10"	IPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.11.11.2726
10"	IPS	1"	CTS	5,31	1,89	1,74	D	30.SE1.13.11.2728
10"	IPS	1"	IPS	5,31	3,27	1,76	D	30.SE1.11.11.2733
10"	IPS	1 1/4"	IPS	5,31	3,50	1,79	D	30.SE1.11.11.2742
10"	IPS	1 1/4"	CTS	5,31	3,27	1,76	D	30.SE1.13.11.2734
10"	IPS	1 1/2"	IPS	7,09	3,39	2,76	D	30.SE1.11.11.2748
10"	IPS	2"	IPS	7,09	4,45	2,76	D	30.SE1.11.11.2760
3"	DIPS	1/2"	CTS	5,31	1,89	2,21	A	30.SE1.23.11.1015
3"	DIPS	1/2"	IPS	5,31	1,89	2,25	A	30.SE1.21.11.1021
3"	DIPS	3/4"	CTS	5,31	1,89	2,25	A	30.SE1.23.11.1022
3"	DIPS	3/4"	IPS	5,31	2,17	2,29	A	30.SE1.21.11.1026
3"	DIPS	1"	CTS	5,31	2,17	2,29	A	30.SE1.23.11.1028
3"	DIPS	1"	IPS	5,31	2,68	2,36	A	30.SE1.21.11.1033
3"	DIPS	1 1/4"	IPS	5,31	2,76	2,38	A	30.SE1.21.11.1042
3"	DIPS	1 1/4"	CTS	5,31	2,68	2,36	A	30.SE1.23.11.1034
3"	DIPS	1 1/2"	IPS	7,09	2,95	3,31	C	30.SE1.21.11.1048
3"	DIPS	2"	IPS	7,09	2,95	3,31	C	30.SE1.21.11.1060
4"	DIPS	1/2"	CTS	5,31	1,89	2,27	A	30.SE1.23.11.1215
4"	DIPS	1/2"	IPS	5,31	1,89	2,29	A	30.SE1.21.11.1221
4"	DIPS	3/4"	CTS	5,31	1,89	2,29	A	30.SE1.23.11.1222
4"	DIPS	3/4"	IPS	5,31	2,17	2,32	A	30.SE1.21.11.1226
4"	DIPS	1"	CTS	5,31	2,17	2,32	A	30.SE1.23.11.1228
4"	DIPS	1"	IPS	5,31	2,68	2,36	A	30.SE1.21.11.1233
4"	DIPS	1 1/4"	IPS	5,31	2,76	2,38	A	30.SE1.21.11.1242
4"	DIPS	1 1/4"	CTS	5,31	2,68	2,36	A	30.SE1.23.11.1234
4"	DIPS	1 1/2"	IPS	7,09	2,95	3,31	C	30.SE1.21.11.1248

SDR11 ELECTROFUSION TAPPING TEES DUAL RATED WATER/NATURAL GAS

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	H	L	Unit Weight in lbs	TYPE	Item Code
4"	DIPS	2"	IPS	7,09	2,95	3,31	C	30.SE1.21.11.1260
6"	DIPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.23.11.1715
6"	DIPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.21.11.1721
6"	DIPS	3/4"	CTS	5,31	2,01	1,72	D	30.SE1.23.11.1722
6"	DIPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.21.11.1726
6"	DIPS	1"	CTS	5,31	1,89	1,76	D	30.SE1.23.11.1728
6"	DIPS	1"	IPS	5,31	3,27	1,76	D	30.SE1.21.11.1733
6"	DIPS	1 1/4"	IPS	5,31	3,50	1,79	D	30.SE1.21.11.1742
6"	DIPS	1 1/4"	CTS	5,31	3,27	1,76	D	30.SE1.23.11.1734
6"	DIPS	1 1/2"	IPS	7,09	3,39	2,87	D	30.SE1.21.11.1748
6"	DIPS	2"	IPS	7,09	3,39	2,87	D	30.SE1.21.11.1760
8"	DIPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.23.11.2215
8"	DIPS	1/2"	IPS	5,31	2,01	1,74	D	30.SE1.21.11.2221
8"	DIPS	3/4"	CTS	5,31	2,01	1,74	D	30.SE1.23.11.2222
8"	DIPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.21.11.2226
8"	DIPS	1"	CTS	5,31	1,89	1,76	D	30.SE1.23.11.2228
8"	DIPS	1"	IPS	5,31	3,27	1,79	D	30.SE1.21.11.2233
8"	DIPS	1 1/4"	IPS	5,31	3,50	1,81	D	30.SE1.21.11.2242
8"	DIPS	1 1/4"	CTS	5,31	3,27	1,79	D	30.SE1.23.11.2234
8"	DIPS	1 1/2"	IPS	7,09	3,39	2,76	D	30.SE1.21.11.2248
8"	DIPS	2"	IPS	7,09	4,45	2,76	D	30.SE1.21.11.2260
10"	DIPS	1/2"	CTS	5,31	2,01	1,72	D	30.SE1.23.11.2815
10"	DIPS	1/2"	IPS	5,31	2,01	1,72	D	30.SE1.21.11.2821
10"	DIPS	3/4"	CTS	5,31	2,01	1,74	D	30.SE1.23.11.2822
10"	DIPS	3/4"	IPS	5,31	1,89	1,74	D	30.SE1.21.11.2826
10"	DIPS	1"	CTS	5,31	1,89	1,74	D	30.SE1.23.11.2828
10"	DIPS	1"	IPS	5,31	3,27	1,76	D	30.SE1.21.11.2833
10"	DIPS	1 1/4"	IPS	5,31	3,50	1,81	D	30.SE1.21.11.2842
10"	DIPS	1 1/4"	CTS	5,31	3,27	1,76	D	30.SE1.23.11.2834
10"	DIPS	1 1/2"	IPS	7,09	3,39	2,76	D	30.SE1.21.11.2848
10"	DIPS	2"	IPS	7,09	4,45	2,76	D	30.SE1.21.11.2860