

SDR11 ELECTROFUSION LARGE BRANCH SADDLES


Water - 240 PSI at 73 Deg F Sustainable

Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum

Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

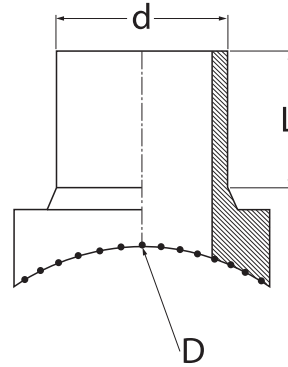

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	L	Unit Weight in lbs	Item Code
3"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.8888
4"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.1188
4"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.1111
5"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.1388
5"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.1311
6"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.1688
6"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.1611
6"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.1613
6"	IPS	6"	IPS	5,91	4,20	30.BS1.11.11.1616
8"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.2188
8"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.2111
8"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.2113
8"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.2116
8"	IPS	7"	IPS	5,91	5,07	30.BS1.11.11.2118
8"	IPS	8"	IPS	5,91	5,07	30.BS1.11.11.2121
10"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.2788
10"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.2711
10"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.2713
10"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.2716
10"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.2721

SDR11 ELECTROFUSION LARGE BRANCH SADDLES**Water** - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure**Gas** - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

• Suitable for Water, Fluids & Slurry's

• Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems

• Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	L	Unit Weight in lbs	Item Code
12"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.3288
12"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.3211
12"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.3213
12"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.3216
12"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.3221
14"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.3588
14"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.3511
14"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.3513
14"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.3516
14"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.3521
16"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.4088
16"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.4011
16"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.4013
16"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.4016
16"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.4021
18"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.4588
18"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.4511
18"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.4513
18"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.4516
18"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.4521
20"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.5088
20"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.5011
20"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.5013
20"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.5016
20"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.5021
22"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.5588
22"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.5511
22"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.5513
22"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.5516
22"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.5521
24"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.6088
24"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.6011
24"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.6013
24"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.6016
24"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.6021
30"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.7688
30"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.7611
30"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.7613
30"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.7616
30"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.7621
32"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.8188
32"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.8111
32"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.8113



SDR11 ELECTROFUSION LARGE BRANCH SADDLES

Water - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	L	Unit Weight in lbs	Item Code
32"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.8116
32"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.8121
36"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.9188
36"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.9111
36"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.9113
36"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.9116
36"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.9121
1000 mm.	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.1088
1000 mm.	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.1011
1000 mm.	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.1013
1000 mm.	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.1016
1000 mm.	IPS	7"	IPS	5,91	5,07	30.BS1.11.11.1018
1000 mm.	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.1021
42"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.10688
42"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.10611
42"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.10613
42"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.10616
42"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.10621
48"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.12188
48"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.12111
48"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.12113
48"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.12116
48"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.12121
54"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.13788
54"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.13711
54"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.13713
54"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.13716
54"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.13721
63"	IPS	3"	IPS	3,54	1,32	30.BS1.11.11.16088
63"	IPS	4"	IPS	3,54	2,65	30.BS1.11.11.16011
63"	IPS	5"	IPS	4,33	3,97	30.BS1.11.11.16013
63"	IPS	6"	IPS	5,91	5,07	30.BS1.11.11.16016
63"	IPS	8"	IPS	5,91	9,92	30.BS1.11.11.16021
6"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.1712
8"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.2212
8"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.2217
10"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.2812
10"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.2817
10"	DIPS	8"	DIPS	5,71	19,84	30.BS1.22.11.2822
12"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.3312
12"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.3317
12"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.3322
14"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.3812
14"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.3817
14"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.3822
16"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.4412
16"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.4417
16"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.4422
18"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.4912
18"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.4917

SDR11 ELECTROFUSION LARGE BRANCH SADDLES**Water** - 240 PSI at 73 Deg F Sustainable Maximum Operating Pressure**Gas** - 150 PSI at 73 Deg F Sustainable Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

BASE (D)	BASE NORM	OUTLET (d)	OUTLET NORM	L	Unit Weight in lbs	Item Code
18"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.4922
20"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.5412
20"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.5417
20"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.5422
24"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.6512
24"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.6517
24"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.6522
30"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.8112
30"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.8117
30"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.8122
36"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.9712
36"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.9717
36"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.9722
42"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.11312
42"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.11317
42"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.11322
48"	DIPS	4"	DIPS	3,54	2,65	30.BS1.22.11.12912
48"	DIPS	6"	DIPS	5,91	5,07	30.BS1.22.11.12917
48"	DIPS	8"	DIPS	5,71	18,74	30.BS1.22.11.12922