


SDR11 ELECTROFUSION REDUCERS

Water - 240 PSI at 73 Deg F Sustainable
Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable
Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

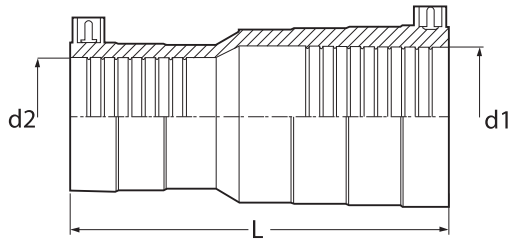

Nominal Pipe Size d1*d2	L	Unit Weight in lbs.	Item Code
1" IPS X 1/2" IPS	3,54	0,09	30.RE1.11.11.3321
1" IPS X 3/4" CTS	3,54	0,11	30.RE1.13.11.3322
1" IPS X 3/4" IPS	3,54	0,09	30.RE1.11.11.3326
1 1/4" IPS X 1" IPS	4,61	0,20	30.RE1.11.11.4233
1 1/2" IPS X 1" IPS	5,16	0,33	30.RE1.11.11.4833
2" IPS X 1" IPS	5,59	0,49	30.RE1.11.11.6033
2" IPS X 1 1/4" IPS	5,47	0,53	30.RE1.11.11.6042
2" IPS X 1 1/2" IPS	5,98	0,57	30.RE1.11.11.6048
3" IPS X 2" IPS	7,48	1,28	30.RE1.11.11.8860
4" IPS X 2" IPS	8,23	1,94	30.RE1.11.11.1160
4" IPS X 3" IPS	8,46	2,40	30.RE1.11.11.1188